

A quasi-potential flow formulation for predicting acoustic shielding by a lifting body with finite element methods

S. Mancini^{1,2}, R.J.Astley¹, G.Gabard¹, S.Sinayoko¹, M.Tournour²

¹Institute of Sound and Vibration Research
University of Southampton

²Siemens Industry Software NV


Euronoise 2015, paper 0051

corresponding author: s.mancini@soton.ac.uk

Acknowledgment: FP7-PEOPLE-2013-ITN CRANE is funded by the European Commission

Motivation:

- **Acoustic radiation** in large-scale unbounded domains still computationally challenging
- Shear layer refraction is important for estimating aircraft acoustic installation effects
- **Wave refraction** by shear layers and wake is not included in full potential formulations

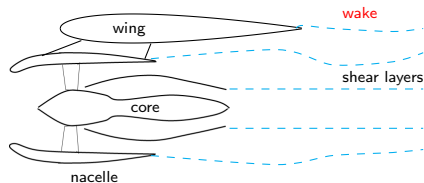


- Free shear layer for a potential formulation
- Lift generation in quasi-potential flows
- Wave refraction by quasi-potential flows
- Test case: wave scattering by a NACA0012
- Concluding remarks


- Flow non-potential around bodies and on shear layers
- Shear layer with no thickness

Physical model

- Continuity of pressure across the shear layer
- Continuity of particle velocity normal to the shear layer
- Discontinuity of particle velocity tangent to the shear layer




- Circulatory solution is non-potential
- Superposition of circulatory and potential solution

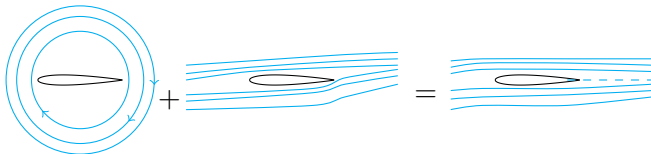

Generation of the circulatory solution:


- Circulation Γ as discontinuity solution at the shear layer

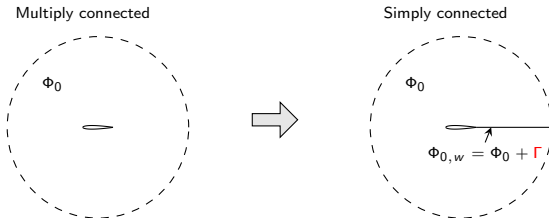

Simplified shear layer model for wave refraction

- Shear layer model: linear with fix extent
- **Continuity** of **normal particle displacement** satisfied by assuming an incompressible mean flow
- **Continuity** of **acoustic pressure** across the shear layer explicitly imposed

$$\Delta p_w = p_u - p_l = 0 \quad (1)$$

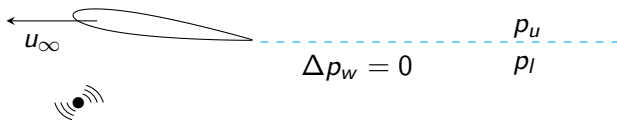

1) Steady incompressible potential mean flow

Finite Element Method (FEM):

$$\nabla^2 \Phi_0 = 0$$

← Shear layer:
 $\Phi_{0,w} = \Phi_0 + \Gamma$

2) Wave propagation

FEM:


$$\frac{\partial}{\partial t} \left(\frac{D_0 \phi}{Dt} \right) - \nabla \cdot \left(c_\infty^2 \nabla \phi - \frac{D_0 \phi}{Dt} \mathbf{u}_0 \right) = 0$$

← Shear layer:
 $\Delta p_w = 0$

with $p = -\rho_\infty \frac{D_0 \phi}{Dt}$ and $\frac{D_0 \phi}{Dt} = \frac{\partial \phi}{\partial t} + \mathbf{u}_0 \cdot \nabla \phi$

Wave propagation solved in the frequency domain (steady state).

Test case: scattering by a NACA 0012

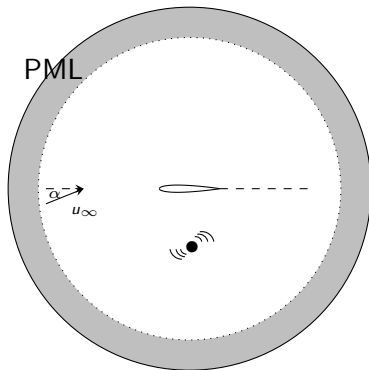

PML: Perfectly Matched Layer

α : angle of attack

u_∞ : uniform flow velocity

- **Mean flow:** shear layer extent tuned to satisfy the **Kutta condition**
- **Wave propagation:** **Kutta condition** forced at the trailing edge

Predominance of source amplification due to uniform flow effects

Effect of the mean flow Mach number

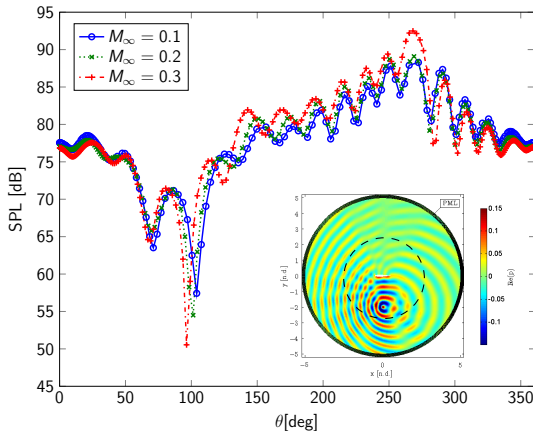


Figure: Sound pressure level. $He = kL = 9.24$, $R_{fp} = 2.5L$, $\alpha = 4^\circ$. Scattering by a NACA 0012 from a monopole source with a non-uniform mean flow.

Phase shift of the shielding effect due to a change in incidence

Effect of the angle of attack

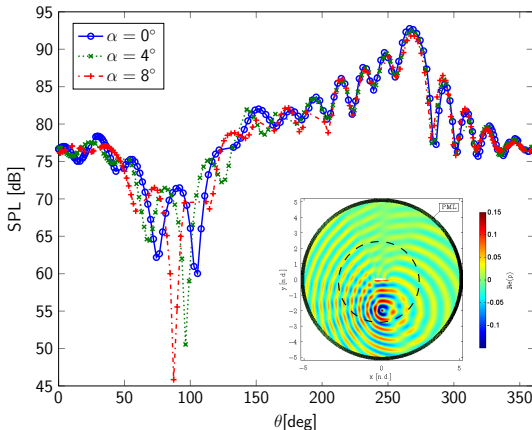


Figure: Sound pressure level. $He = kL = 9.24$, $R_{fp} = 2.5L$, $M_\infty = 0.3$. Scattering by a NACA 0012 from a monopole source with a non-uniform mean flow.

Model

- Lift generation and wave refraction by shear layers modeled with a limited increase in computational resources: quasi-potential formulation

contribution:

- ▶ A validated solution for mean flows was integrated with an existing shear layer model for wave refraction

Physical insight

- Wave propagation around lifting bodies:
 - ▶ noise amplification is mainly due to uniform flow convection of sound sources
 - ▶ Incidence affects mainly the extent of the shielded area

Thank you.

References:



R.J. Astley: Numerical methods for noise propagation in moving flows, with application to turbofan engines. *Acoustical Science and Technology* 30 (2009) 227–239.



E. Baskharone, A. Hamed: A new approach to cascade flow analysis using the finite element method. *Proc. AIAA 18th Aerosp.* 1980, 1-9.



W. Eversman, D. Okunbor: Aft fan duct acoustic radiation. *Journal of Sound and Vibration* 2 (1998) 235-257.



E.O. Suciú, L. Morino: Nonlinear steady incompressible lifting-surface analysis with wake roll-up. *AIAA Journal* 15 (1977) 54-58.



S.R. Sipcic, L. Morino: Wake dynamics for incompressible and compressible flows. In: L. Morino (Ed.). *Computational Methods in Potential Aerodynamics*, Springer Verlag, Berlin, 1986.



R.J. Astley: A finite element, wave envelope formulation for acoustical radiation in moving flows. *Journal of Sound and Vibration* 3 (1985) 471-485.



A. Bermudez, L. Hervella-Nieto, A. Prieto, R. Rodriguez: An optimal perfectly matched layer with unbounded absorbing function for time-harmonic acoustic scattering problems. *Journal of Computational Physics* 2 (2007) 469-488.




D. C. Eleni, T. I. Athanasios and M. P. Dionissios: Evaluation of the turbulence models for the simulation of the flow over a National Advisory Committee for Aeronautics (NACA) 0012 airfoil. *Journal of Mechanical Engineering Research* 4 (2012) 100-111.

Mean flow:

$$\int_{V-V_w} \nabla W \cdot \nabla \Phi_0 dV + \int_{V_w} \nabla W \cdot \nabla \Phi_{0,w} dV = \int_{\partial V} W (\nabla \Phi_0 \cdot \mathbf{n}) dS \quad (2)$$

- $\Phi_{0,w} = \Phi_0 + \Gamma$
- Polynomial interpolation:
$$\Phi_0 = \sum_{m=1}^M N_m \Phi_{0_m}$$
$$\Phi_{0,w} = \sum_{m=1}^M N_m \Phi_{0_m} + N_g \Gamma$$
- Linear FEM with
 $0.4L \leq L_e \leq 5 \cdot 10^{-3}L$

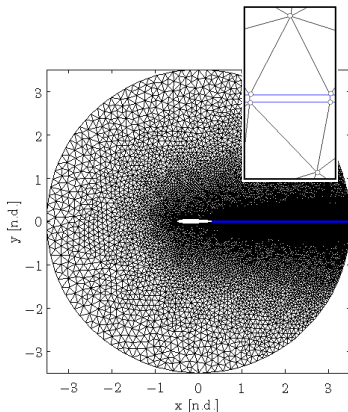

Wave propagation:

$$\int_V \rho_0 \nabla \Upsilon^* \cdot \nabla \tilde{\phi} dV - \int_V \frac{\rho_0}{c_0^2} (\mathbf{u}_0 \cdot \nabla \Upsilon^*) (\mathbf{u}_0 \cdot \nabla \tilde{\phi}) dV + i\omega \int_V \frac{\rho_0}{c_0^2} [\tilde{\phi} (\mathbf{u}_0 \cdot \nabla \Upsilon^*) - \Upsilon^* (\mathbf{u}_0 \cdot \nabla \tilde{\phi})] dV - \omega^2 \int_V \frac{\rho_0}{c_0^2} \Upsilon^* \tilde{\phi} dV = \int_{\partial V} \frac{\rho_0}{c_0^2} [c_0^2 \Upsilon^* \nabla \tilde{\phi} - \mathbf{u}_0 \Upsilon^* (\mathbf{u}_0 \cdot \nabla \tilde{\phi}) - i\omega \mathbf{u}_0 \Upsilon^* \tilde{\phi}] \cdot \mathbf{n} dS + \mu \int_{V_W} \Upsilon^* \Delta p dV \quad (3)$$

- Penalty factor $\mu = 10^5$
- Polynomial interpolation:

$$\tilde{\phi} = \sum_{m=1}^M N_m \phi_m$$

$$p = -\rho_\infty (i\omega \tilde{\phi} + \mathbf{u}_0 \cdot \nabla \tilde{\phi})$$
- Linear FEM with 15 Dof/ λ

