

# On the separation of hydrodynamic and acoustic waves in linear free-shear flows

A. Agarwal, G. Gabard and S. Sinayoko

University of Southampton  
*Institute of Sound and Vibration Research*

EURONOISE, 2008


# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions

# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions

# Objective

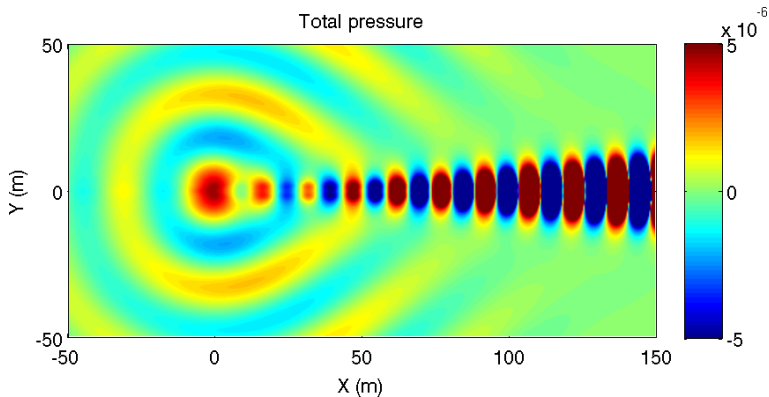

- filter out the acoustic waves
- leave the hydrodynamic waves unchanged

# Outline

- 1 Introduction
  - Objective
  - **Motivation**
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions

# Motivation

## Frequency based methods

- Direct solver → Agarwal
- Pseudo time-matching → Karabasov

## Time domain methods

Approximate method valid at high frequencies → Ewert

⇒ lack for a general method in time domain.

# Motivation

## Frequency based methods

- Direct solver → Agarwal
- Pseudo time-matching → Karabasov

## Time domain methods

Approximate method valid at high frequencies → Ewert

⇒ **lack for a general method in time domain.**

# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions



# Introduction to filtering in time domain

## Flow decomposition

### Flow decomposition

$$p = \tilde{p} + p'$$

$\tilde{p}$  base flow obtained by filtering  $p$

$p'$  fluctuating part

### What we want

- $\tilde{p}$ : no acoustic fluctuations  $\Rightarrow$  non-propagating base flow
- $p'$ : acoustic fluctuations only.

# Introduction to filtering in time domain

## Flow decomposition

### Flow decomposition

$$p = \tilde{p} + p'$$

$\tilde{p}$  base flow obtained by filtering  $p$

$p'$  fluctuating part

### What we want

- $\tilde{p}$ : no acoustic fluctuations  $\Rightarrow$  **non-propagating base flow**
- $p'$ : acoustic fluctuations only.

# Introduction to filtering in time domain

## Convolution filter example

### Convolution filter example: 1 dimensional signal

Moving average filter:  $\tilde{s} = h_{MA} * s$

\$WTIC (Oil - Light Crude - Continuous Contract (EOD)) INDX

© StockCharts.com

12-Jun-2008

Open 137.17 High 138.09 Low 132.25 Close 137.38 Chg +1.00 (+0.73%) ▲

— \$WTIC (Daily) 137.38

— MA(50) 121.54

▒ Volume undef



# Introduction to filtering in time domain

## Convolution filter example

### Convolution filter example: 2 dimensional signal

Image  $s$



$\tilde{s} = h * s$



# Introduction to filtering in time domain

## Differential filter example

### Differential filter example

Image  $s$



$$\tilde{s} = \nabla^2 s$$



# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - **Filter characteristics**
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions

# Filter characteristics

## Defining property

$$\tilde{P}(\mathbf{k}, \omega) = 0 \quad \text{for} \quad |\mathbf{k}| = \frac{|\omega|}{c_0}$$

## Other requirements

- Causality
- Easy to implement

# Filter characteristics

## Defining property

$$\tilde{P}(\mathbf{k}, \omega) = 0 \quad \text{for} \quad |\mathbf{k}| = \frac{|\omega|}{c_0}$$

## Other requirements

- Causality
- Easy to implement



# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions

# The wave-operator filter

## Time domain

$$\tilde{p}(\mathbf{x}, t) = \left( \frac{1}{c_0^2} \frac{\partial^2}{\partial t^2} - \nabla^2 \right) p(\mathbf{x}, t),$$

## Frequency domain

$$\tilde{P}(\mathbf{k}, \omega) = \left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right) P(\mathbf{k}, \omega)$$

$$\Rightarrow \tilde{P}(\mathbf{k}, \omega) = 0 \quad \text{for} \quad |\mathbf{k}| = \frac{|\omega|}{c_0}$$

# The wave-operator filter

## Time domain

$$\tilde{p}(\mathbf{x}, t) = \left( \frac{1}{c_0^2} \frac{\partial^2}{\partial t^2} - \nabla^2 \right) p(\mathbf{x}, t),$$

## Frequency domain

$$\tilde{P}(\mathbf{k}, \omega) = \left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right) P(\mathbf{k}, \omega)$$

$$\Rightarrow \tilde{P}(\mathbf{k}, \omega) = 0 \quad \text{for} \quad |\mathbf{k}| = \frac{|\omega|}{c_0}$$

# The wave-operator filter

## Time domain

$$\tilde{p}(\mathbf{x}, t) = \left( \frac{1}{c_0^2} \frac{\partial^2}{\partial t^2} - \nabla^2 \right) p(\mathbf{x}, t),$$

## Frequency domain

$$\tilde{P}(\mathbf{k}, \omega) = \left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right) P(\mathbf{k}, \omega)$$


$$\Rightarrow \tilde{P}(\mathbf{k}, \omega) = 0 \quad \text{for} \quad |\mathbf{k}| = \frac{|\omega|}{c_0}$$

# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 Corrective filter
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions

# Filtering of a two-dimensional problem



## Parallel flow & source definitions

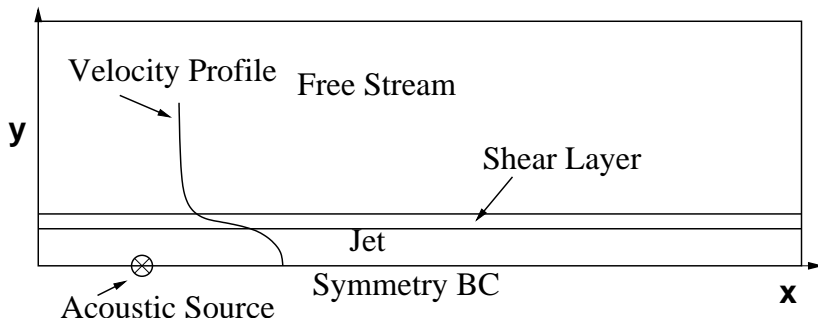

- $M_j = 0.756$
- $T_j = 600 \text{ K}$
- Gaussian harmonic energy source,  $\omega_0 = 76 \text{ rad/s}$

# Filtering of a two-dimensional problem

## Results

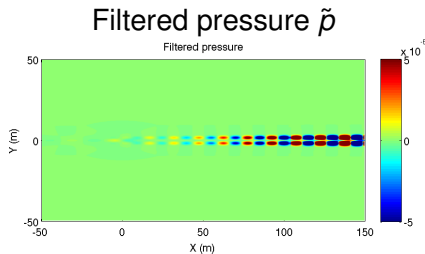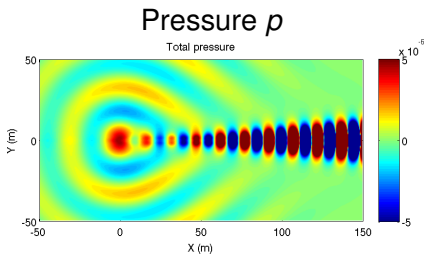

## Results

- acoustic waves are filtered successfully
- hydrodynamic waves are distorted

# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 **Corrective filter**
  - **Rationale**
  - Proof of concept based on the two-dimensional shear layer problem
  - General solution based on Green's functions



# Rationale

## Inverse filtering in frequency domain

$$1 \quad \tilde{P}(\mathbf{k}, \omega) = \left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right) P(\mathbf{k}, \omega)$$

$$2 \quad \hat{P}(\mathbf{k}, \omega) = \frac{1}{\left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right)} \tilde{P}(\mathbf{k}, \omega)$$

## Convolution filtering

$$1 \quad \text{Time domain: } \hat{p} = h * \tilde{p}$$

$$2 \quad \text{Frequency domain: } \hat{P} = H \tilde{P}$$

$$\Rightarrow H = \frac{1}{\left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right)}$$

# Rationale

## Inverse filtering in frequency domain

- 1  $\tilde{P}(\mathbf{k}, \omega) = \left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right) P(\mathbf{k}, \omega)$
- 2  $\hat{P}(\mathbf{k}, \omega) = \frac{1}{\left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right)} \tilde{P}(\mathbf{k}, \omega)$

## Convolution filtering

- 1 Time domain:  $\hat{p} = h * \tilde{p}$
- 2 Frequency domain:  $\hat{P} = H\tilde{P}$

$$\Rightarrow H = \frac{1}{\left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right)}$$

# Rationale

## Inverse filtering in frequency domain

$$1 \quad \tilde{P}(\mathbf{k}, \omega) = \left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right) P(\mathbf{k}, \omega)$$

$$2 \quad \hat{P}(\mathbf{k}, \omega) = \frac{1}{\left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right)} \tilde{P}(\mathbf{k}, \omega)$$

## Convolution filtering

$$1 \quad \text{Time domain: } \hat{p} = h * \tilde{p}$$

$$2 \quad \text{Frequency domain: } \hat{P} = H \tilde{P}$$

$$\Rightarrow H = \frac{1}{\left( |\mathbf{k}|^2 - \frac{\omega^2}{c_0^2} \right)}$$

# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 **Corrective filter**
  - Rationale
  - **Proof of concept based on the two-dimensional shear layer problem**
  - General solution based on Green's functions

# Proof of concepts based on the two-dimensional shear layer problem

## Corrective filter

### Two dimensional shear layer problem

- $k_x = \text{constant} = k_{x_0}$
- $\omega = \text{constant} = \omega_0$

$$\Rightarrow h(\mathbf{x}, t) = \delta(x)\delta(t)\frac{e^{-\kappa|y|}}{2\kappa}$$

# Proof of concepts based on the two-dimensional shear layer problem

## Corrective filter



### Two dimensional shear layer problem

- $k_x = \text{constant} = k_{x_0}$
- $\omega = \text{constant} = \omega_0$

$$\Rightarrow h(\mathbf{x}, t) = \delta(x)\delta(t)\frac{e^{-\kappa|y|}}{2\kappa}$$

# Proof of concepts based on the two-dimensional shear layer problem

## Results

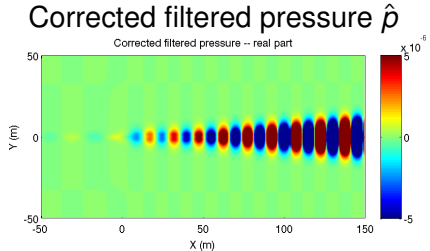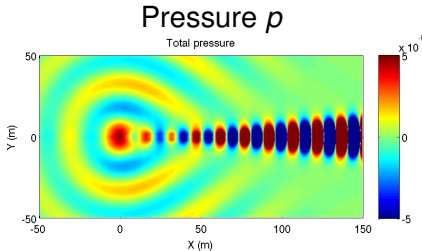

⇒ Reconstruction of the hydrodynamic wave from the filtered pressure seems possible.

# Outline

- 1 Introduction
  - Objective
  - Motivation
  - Introduction to filtering in time domain
  - Filter characteristics
- 2 Wave-operator filter
  - The wave-operator filter
  - Filtering of a two-dimensional shear layer problem
- 3 **Corrective filter**
  - Rationale
  - Proof of concept based on the two-dimensional shear layer problem
  - **General solution based on Green's functions**



# General solution based on Green's function

## Green's function

### Wave-operator filtering

$$\square^2 p = \tilde{p}$$

- $\square^2$  denotes the wave operator
- $\tilde{p}$  is the **source term**

### Inverse filtering with Green's function

$$p = G * \tilde{p},$$

$G$  is a free field Green's function for operator  $\square^2$ .

# General solution based on Green's function

## Corrective filter in two and three dimensions

### Corrective filter in two dimensions

$$\hat{p}(\mathbf{x}, t) = \int_S \int_{\frac{|\mathbf{x}'|}{c_0}}^{+\infty} \frac{\tilde{p}(\mathbf{x} - \mathbf{x}', t - t')}{2\pi \sqrt{t'^2 - |\mathbf{x}'|^2/c_0^2}} dt' d^2\mathbf{x}'$$




### Corrective filter in three dimensions

$$\hat{p}(\mathbf{x}, t) = \int_V \frac{\tilde{p}(\mathbf{x} - \mathbf{x}', t - |\mathbf{x}'|/c_0)}{4\pi |\mathbf{x}'|} d^3\mathbf{x}'$$

# Summary

- Wave-operator allows to filter acoustic fluctuations easily
- It distorts the hydrodynamic fluctuations
- A corrective filter based on Green's function could be used to restore the hydrodynamic fluctuations.

## For further reading

-  Anurag Agarwal, Philip J. Morris, and Ramani Mani.  
Calculation of sound propagation in nonuniform flows:  
Suppression of instability waves.  
*AIAA Journal*, 42(1):80 – 88, 2004.
-  SA Karabasov and TP Hynes.  
An Efficient Frequency-Domain Algorithm for Wave  
Scattering Problems with Application to Jet Noise.  
*11 th AIAA/CEAS Aeroacoustics Conference(26 th  
Aeroacoustics Conference)*, pages 1–12, 2005.
-  R. Ewert and W. Schröder.  
Acoustic perturbation equations based on flow  
decomposition via source filtering.  
*Journal of Computational Physics*, 188(2):365–398, 2003.